Transparenz at a glance

Flexible solutions made of glass and metal.



Transparenz at a glance

The standard components of the

transparenz system building kit.


meng signsystems


transparenz



transparenz

With the standardized profile lengths based on DIN dimensions and the corresponding surface formats, we offer control system planners a construction kit for their creative design. Glass up to 8 mm is the predominant surface material. However, other materials up to this thickness are also conceivable. The retaining profiles are in two parts and are equipped with a concealed clamping function. This makes it possible to first anchor the calf profile to the wall and then apply the cover profile. The profile height is exactly 30 mm, the total construction depth is a slim 16 mm.

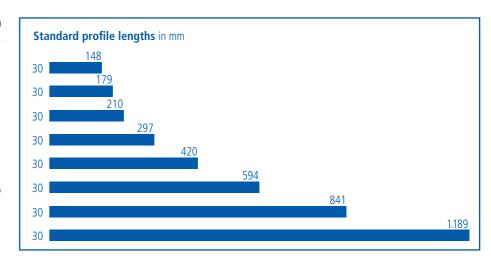

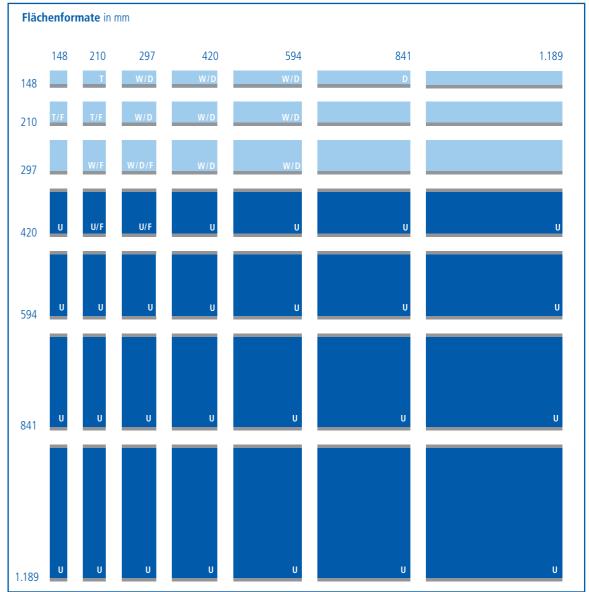

The transparency clamping profiles are used in standard products as:

Door plate always with a system profile crosswise

at the bottom.

Wall signpost with a profile at the

bottom crosswise.

Ceiling signposts always with a system profile across the top.

Flag signpost with a vertical profile.

U =Overviews always with two horizontal system profiles.